

PARATHOM advanced PAR16

Dimmable LED reflector lamps PAR16 with retrofit pin base



Areas of application

- Spotlighting for accents
- Display cabinets and shop windows
- Retail outlets and exhibition rooms
- Spotlighting heat-sensitive objects such as food, plants, etc.
- Outdoor applications only in suitable luminaires
- Directional light sources
- Hospitality
- Shops

Product benefits

- Very low energy consumption
- Extremely long life
- Robust against vibrations
- No UV and near-IR radiation in the light beam
- Professional thermal management
- Efficient generation of white light
- Alternative to line-voltage halogen lamps
- Ideal for economical spotlighting

Product features

- Professional LED lamps for line voltage
- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Made in Europe
- Base: GU10
- Lifetime: up to 35,000 h
- Mercury-free lamps



Product family datasheet

- High color consistency; SDCM: < 5 (PARATHOM PRO)

Product family datasheet

Technical data

Product description	Electrical data			Photometrical data						Light technical data	
	Nominal wattage	Nominal voltage	Claimed equiv. conventional lamp power	Luminous intensity	Nominal luminous flux	Rated luminous flux	Color temperature	Color rendering index Ra	Light color (designation)	Beam angle	Warm-up time (60 %)
PARATHOM PAR16 35 36° ADV 3.3 W/827 GU10 ¹⁾	3.30 W	220...240 V	35 W	565 cd	230 lm	230 lm	2700 K	80	Warm White	36 °	0.30 s
PARATHOM PAR16 35 36° ADV 3.3 W/830 GU10 ¹⁾	3.30 W	220...240 V	35 W	565 cd	230 lm	230 lm	3000 K	80	Warm White	36 °	0.30 s
PARATHOM PAR16 35 36° ADV 3.3 W/840 GU10 ¹⁾	3.30 W	220...240 V	35 W	565 cd	230 lm	230 lm	4000 K	80	Cool White	36 °	0.30 s
PARATHOM PAR16 35 36° ADV 3.6 W/827 GU10 ²⁾	3.60 W	220...240 V	35 W	700 cd	230 lm	230 lm	2700 K	80	Warm White	36 °	< 0.50 s
PARATHOM PAR16 35 36° ADV 3.6 W/830 GU10 ²⁾	3.60 W	220...240 V	35 W	700 cd	230 lm	230 lm	3000 K	80	Warm White	36 °	< 0.50 s
PARATHOM PAR16 35 36° ADV 3.6 W/840 GU10 ²⁾	3.60 W	220...240 V	35 W	750 cd	230 lm	230 lm	4000 K	80	Cool White	36 °	< 0.50 s
PARATHOM PAR16 50 36° ADV 5.3 W/827 GU10 ²⁾	5.30 W	220...240 V	50 W	950 cd	350 lm	350 lm	2700 K	80	Warm White	36 °	< 0.50 s
PARATHOM PAR16 50 36° ADV 5.3 W/830 GU10 ²⁾	5.30 W	220...240 V	50 W	950 cd	350 lm	350 lm	3000 K	80	Warm White	36 °	< 0.50 s
PARATHOM PAR16 50 36° ADV 5.3 W/840 GU10 ²⁾	5.30 W	220...240 V	50 W	1000 cd	350 lm	350 lm	4000 K	≥80	Cool White	36 °	< 0.50 s
PARATHOM PAR16 50 36° ADV 5.5 W/827 GU10 ²⁾	5.50 W	220...240 V	50 W	850 cd	350 lm	350 lm	2700 K	80	Warm White	36 °	0.15 s
PARATHOM PAR16 50 36° ADV 5.5 W/830 GU10 ¹⁾	5.50 W	220...240 V	50 W	850 cd	350 lm	350 lm	3000 K	80	Warm White	36 °	0.15 s
PARATHOM PAR16 50 36° ADV 5.5 W/840 GU10 ¹⁾	5.50 W	220...240 V	50 W	850 cd	350 lm	350 lm	4000 K	80	Cool White	36 °	0.15 s
PARATHOM PAR16 65 36° ADV 5.9 W/827 GU10 ¹⁾	5.90 W	220...240 V	65 W	1164 cd	460 lm	460 lm	2700 K	80	Warm White	36 °	0.30 s

Product family datasheet

Product description	Electrical data			Photometrical data						Light technical data	
	Nominal wattage	Nominal voltage	Claimed equiv. conventional lamp power	Luminous intensity	Nominal luminous flux	Rated luminous flux	Color temperature	Color rendering index Ra	Light color (designation)	Beam angle	Warm-up time (60 %)
PARATHOM PAR16 65 36° ADV 5.9 W/830 GU10 ¹⁾	5.90 W	220...240 V	65 W	1164 cd	460 lm	460 lm	3000 K	80	Warm White	36 °	0.30 s
PARATHOM PAR16 65 36° ADV 5.9 W/840 GU10 ¹⁾	5.90 W	220...240 V	65 W	1164 cd	460 lm	460 lm	4000 K	80	Cool White	36 °	0.30 s
PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10 ¹⁾	7.20 W	220...240 V	80 W	1439 cd	575 lm	575 lm	2700 K	80	Warm White	36 °	0.30 s
PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10 ¹⁾	7.20 W	220...240 V	80 W	1439 cd	575 lm	575 lm	3000 K	80	Warm White	36 °	0.30 s
PARATHOM PAR16 50 36° 4.6 W/827 GU10 ²⁾	4.60 W	220...240 V	50 W	850 cd	350 lm	350 lm	2700 K	≥80	Warm White	36 °	1.00 s
PARATHOM PAR16 50 36° 4.6 W/830 GU10 ²⁾	4.60 W	220...240 V	50 W	850 cd	350 lm	350 lm	3000 K	≥80	Warm White	36 °	1.00 s
PARATHOM PAR16 50 36° 4.6 W/840 GU10 ²⁾	4.60 W	220...240 V	50 W	850 cd	350 lm	350 lm	4000 K	≥80	Cool White	36 °	1.00 s
PARATHOM PAR16 35 36° 3.1 W/827 GU10 ²⁾	3.10 W	220...240 V	35 W	565 cd	230 lm	230 lm	2700 K	≥80	Warm White	36 °	1.00 s
PARATHOM PAR16 35 36° 3.1 W/830 GU10 ²⁾	3.10 W	220...240 V	35 W	565 cd	230 lm	230 lm	3000 K	≥80	Warm White	36 °	1.00 s
PARATHOM PAR16 35 36° 3.1 W/840 GU10 ²⁾	3.10 W	220...240 V	35 W	565 cd	230 lm	230 lm	4000 K	≥80	Cool White	36 °	1.00 s
PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10 ¹⁾	7.20 W	220...240 V	80 W	1439 cd	575 lm	575 lm	2700 K	≥80	Warm White	36 °	1.00 s
PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10 ¹⁾	7.20 W	220...240 V	80 W	1439 cd	575 lm	575 lm	3000 K	≥80	Warm White	36 °	1.00 s
PARATHOM PAR16 80 36° ADV 7.2 W/840 GU10 ¹⁾	7.20 W	220...240 V	80 W	1439 cd	575 lm	575 lm	4000 K	≥80	Cool White	36 °	1.00 s

Product family datasheet

Product description	Dimensions & weight		Lifespan			Additional product data			Capabilities
	Overall length	Diameter	Nominal lamp life time	Number of switching cycles	Lumen main. fact. at end of nom. life time	Base (standard designation)	Mercury content	Mercury-free	Dimmable
PARATHOM PAR16 35 36° ADV 3.3 W/827 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 35 36° ADV 3.3 W/830 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 35 36° ADV 3.3 W/840 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 35 36° ADV 3.6 W/827 GU10 ²⁾	58.0 mm	50.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes ³⁾
PARATHOM PAR16 35 36° ADV 3.6 W/830 GU10 ²⁾	58.0 mm	50.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes ³⁾
PARATHOM PAR16 35 36° ADV 3.6 W/840 GU10 ²⁾	58.0 mm	50.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes ³⁾
PARATHOM PAR16 50 36° ADV 5.3 W/827 GU10 ²⁾	58.0 mm	50.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes ³⁾
PARATHOM PAR16 50 36° ADV 5.3 W/830 GU10 ²⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes ³⁾
PARATHOM PAR16 50 36° ADV 5.3 W/840 GU10 ²⁾	58.0 mm	50.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes ³⁾
PARATHOM PAR16 50 36° ADV 5.5 W/827 GU10 ²⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 50 36° ADV 5.5 W/830 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 50 36° ADV 5.5 W/840 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 65 36° ADV 5.9 W/827 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 65 36° ADV 5.9 W/830 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes

Product family datasheet

Product description	Dimensions & weight		Lifespan			Additional product data			Capabilities
	Overall length	Diameter	Nominal lamp life time	Number of switching cycles	Lumen main. fact. at end of nom. life time	Base (standard designation)	Mercury content	Mercury-free	Dimmable
PARATHOM PAR16 65 36° ADV 5.9 W/840 GU10 ¹⁾	58.0 mm	49.6 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10 ¹⁾	58.0 mm	49.5 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10 ¹⁾	58.0 mm	49.5 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 50 36° 4.6 W/827 GU10 ²⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 50 36° 4.6 W/830 GU10 ²⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 50 36° 4.6 W/840 GU10 ²⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 35 36° 3.1 W/827 GU10 ²⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 35 36° 3.1 W/830 GU10 ²⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 35 36° 3.1 W/840 GU10 ²⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10 ¹⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10 ¹⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes
PARATHOM PAR16 80 36° ADV 7.2 W/840 GU10 ¹⁾	55.0 mm	51.0 mm	25000 h	100000	0.70	GU10	0.0 mg	Yes	Yes

Product family datasheet

	Certificates & standards	Country specific categorizations
Product description	Energy efficiency class	ILCOS
PARATHOM PAR16 35 36° ADV 3.3 W/827 GU10 ¹⁾	A+	DRPAR-3,3/827-230-GU10-50/36
PARATHOM PAR16 35 36° ADV 3.3 W/830 GU10 ¹⁾	A+	DRPAR-3,3/830-230-GU10-50/36
PARATHOM PAR16 35 36° ADV 3.3 W/840 GU10 ¹⁾	A+	DRPAR-3,3/840-230-GU10-50/36
PARATHOM PAR16 35 36° ADV 3.6 W/827 GU10 ²⁾	A+	DRPAR-4,8-220-240-GU10-50/36
PARATHOM PAR16 35 36° ADV 3.6 W/830 GU10 ²⁾	A+	DRPAR-4,8-220-240-GU10-50/36
PARATHOM PAR16 35 36° ADV 3.6 W/840 GU10 ²⁾	A+	DRPAR-4,8-220-240-GU10-50/36
PARATHOM PAR16 50 36° ADV 5.3 W/827 GU10 ²⁾	A+	DRPAR-7,5-220-240-GU10-50/36
PARATHOM PAR16 50 36° ADV 5.3 W/830 GU10 ²⁾	A+	DRPAR-7,5-220-240-GU10-50/36
PARATHOM PAR16 50 36° ADV 5.3 W/840 GU10 ²⁾	A+	DRPAR-7,5-220-240-GU10-50/36
PARATHOM PAR16 50 36° ADV 5.5 W/827 GU10 ²⁾	A+	DRPAR-5,5/827-220/240-GU10-50/36
PARATHOM PAR16 50 36° ADV 5.5 W/830 GU10 ¹⁾	A+	DRPAR-5,5/830-230-GU10-50/36
PARATHOM PAR16 50 36° ADV 5.5 W/840 GU10 ¹⁾	A+	DRPAR-5,5/830-230-GU10-50/36
PARATHOM PAR16 65 36° ADV 5.9 W/827 GU10 ¹⁾	A+	DRPAR-5,9/827-230-GU10-50/36

Product family datasheet


	Certificates & standards	Country specific categorizations
Product description	Energy efficiency class	ILCOS
PARATHOM PAR16 65 36° ADV 5.9 W/830 GU10 ¹⁾	A+	DRPAR-5,9/830-230-GU10-50/36
PARATHOM PAR16 65 36° ADV 5.9 W/840 GU10 ¹⁾	A+	DRPAR-5,9/840-230-GU10-50/36
PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10 ¹⁾	A+	DRPAR-7,2/827-230-GU10-50/36
PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10 ¹⁾	A+	DRPAR-7,2/830-230-GU10-50/36
PARATHOM PAR16 50 36° 4.6 W/827 GU10 ²⁾	A+	DRPAR-4,6/827-220-240-GU10-50/36
PARATHOM PAR16 50 36° 4.6 W/830 GU10 ²⁾	A+	DRPAR-4,6/830-220-240-GU10-50/36
PARATHOM PAR16 50 36° 4.6 W/840 GU10 ²⁾	A+	DRPAR-4,6/840-220-240-GU10-50/36
PARATHOM PAR16 35 36° 3.1 W/827 GU10 ²⁾	A+	DRPAR-3,1/827-220-240-GU10-50/36
PARATHOM PAR16 35 36° 3.1 W/830 GU10 ²⁾	A+	DRPAR-3,1/830-220-240-GU10-50/36
PARATHOM PAR16 35 36° 3.1 W/840 GU10 ²⁾	A+	DRPAR-3,1/840-220-240-GU10-50/36
PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10 ¹⁾	A+	DRPAR-7,2/827-220-240-GU10-50/36
PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10 ¹⁾	A+	DRPAR-7,2/830-220-240-GU10-50/36
PARATHOM PAR16 80 36° ADV 7.2 W/840 GU10 ¹⁾	A+	DRPAR-7,2/840-220-240-GU10-50/36

Product family datasheet


¹⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

²⁾ All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value/LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonics or electronic resonance)


³⁾ With many common dimmers

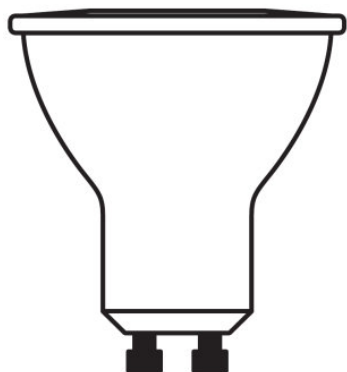


PARATHOM PAR16 35 36° ADV 3.3
W/840 GU10

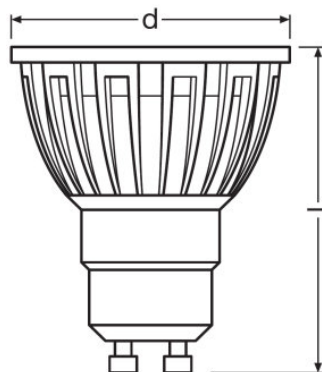

PARATHOM PAR16 35 36° ADV 3.6
W/827 GU10, PARATHOM PAR16 35
36° ADV 3.6 W/830 GU10, PARATHOM
PAR16 35 36° ADV 3.6 W/840 GU10

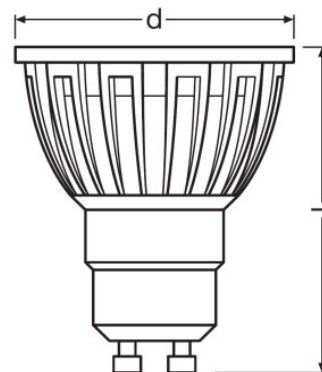


PARATHOM PAR16 50 36° ADV 5.3
W/827 GU10, PARATHOM PAR16 50
36° ADV 5.3 W/830 GU10, PARATHOM
PAR16 50 36° ADV 5.3 W/840 GU10

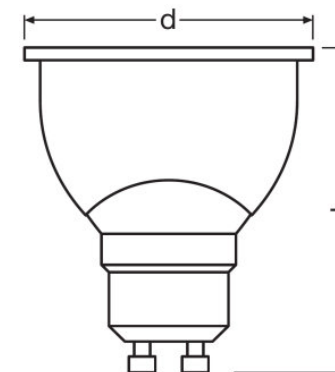


PARATHOM PAR16 50 36° ADV 5.5
W/827 GU10, PARATHOM PAR16 50
36° ADV 5.5 W/830 GU10, PARATHOM
PAR16 50 36° ADV 5.5 W/840 GU10


Product family datasheet

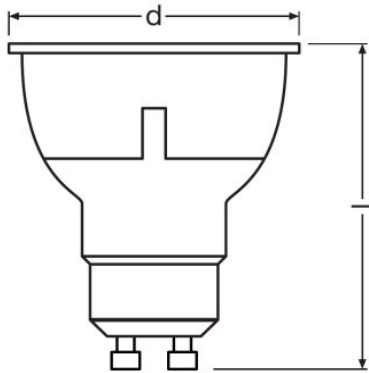


PARATHOM PAR16 65 36° ADV 5.9 W/827 GU10, PARATHOM PAR16 65 36° ADV 5.9 W/830 GU10, PARATHOM PAR16 65 36° ADV 5.9 W/840 GU10, PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10, PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10

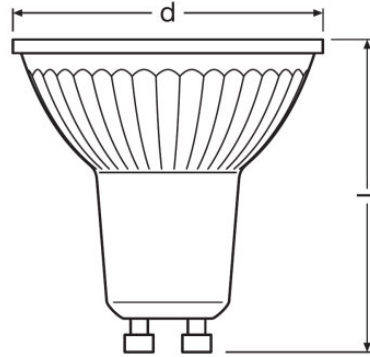

PARATHOM PAR16 50 36° 4.6 W/827 GU10, PARATHOM PAR16 50 36° 4.6 W/830 GU10, PARATHOM PAR16 50 36° 4.6 W/840 GU10, PARATHOM PAR16 35 36° 3.1 W/827 GU10, PARATHOM PAR16 35 36° 3.1 W/830 GU10, PARATHOM PAR16 35 36° 3.1 W/840 GU10, PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10, PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10, PARATHOM PAR16 80 36° ADV 7.2 W/840 GU10

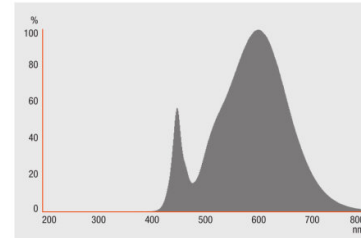


PARATHOM PAR16 35 36° ADV 3.6 W/827 GU10, PARATHOM PAR16 50 36° ADV 5.3 W/827 GU10

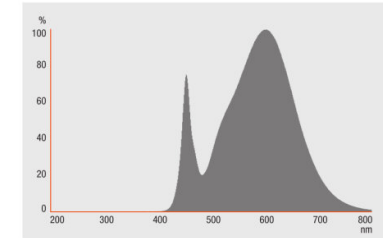

PARATHOM PAR16 35 36° ADV 3.6 W/830 GU10, PARATHOM PAR16 50 36° ADV 5.3 W/830 GU10

Product family datasheet

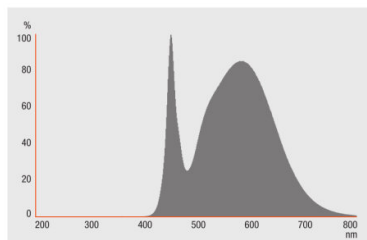

PARATHOM PAR16 35 36° ADV 3.6
W/840 GU10, PARATHOM PAR16 50
36° ADV 5.3 W/840 GU10

Application advice

For more detailed application information and graphics please see product datasheet.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899943902	PARATHOM PAR16 35 36° ADV 3.3 W/827 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	518.00 g
4052899943919	PARATHOM PAR16 35 36° ADV 3.3 W/830 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	519.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899943926	PARATHOM PAR16 35 36° ADV 3.3 W/840 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	521.00 g
4008321881960	PARATHOM PAR16 35 36° ADV 3.6 W/827 GU10	Shipping carton box 10	275 mm x 116 mm x 78 mm	2.49 dm ³	842.00 g
4008321882035	PARATHOM PAR16 35 36° ADV 3.6 W/830 GU10	Shipping carton box 10	275 mm x 116 mm x 78 mm	2.49 dm ³	796.00 g
4008321882066	PARATHOM PAR16 35 36° ADV 3.6 W/840 GU10	Shipping carton box 10	275 mm x 116 mm x 78 mm	2.49 dm ³	785.00 g
4008321882097	PARATHOM PAR16 50 36° ADV 5.3 W/827 GU10	Shipping carton box 10	275 mm x 116 mm x 78 mm	2.49 dm ³	884.00 g
4008321882127	PARATHOM PAR16 50 36° ADV 5.3 W/830 GU10	Shipping carton box 10	275 mm x 116 mm x 78 mm	2.49 dm ³	873.00 g
4008321882158	PARATHOM PAR16 50 36° ADV 5.3 W/840 GU10	Shipping carton box 10	275 mm x 116 mm x 78 mm	2.49 dm ³	892.00 g
4052899943957	PARATHOM PAR16 50 36° ADV 5.5 W/827 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	826.00 g
4052899943964	PARATHOM PAR16 50 36° ADV 5.5 W/830 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	827.00 g
4052899943971	PARATHOM PAR16 50 36° ADV 5.5 W/840 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	831.00 g
4052899943988	PARATHOM PAR16 65 36° ADV 5.9 W/827 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	862.00 g
4052899943995	PARATHOM PAR16 65 36° ADV 5.9 W/830 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	862.00 g
4052899944008	PARATHOM PAR16 65 36° ADV 5.9 W/840 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	862.00 g
4052899944015	PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	898.00 g

Product family datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899944022	PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10	Shipping carton box 10	267 mm x 111 mm x 77 mm	2.28 dm ³	898.00 g
4052899957954	PARATHOM PAR16 50 36° 4.6 W/827 GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	595.00 g
4052899957961	PARATHOM PAR16 50 36° 4.6 W/830 GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	595.00 g
4052899957978	PARATHOM PAR16 50 36° 4.6 W/840 GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	595.00 g
4052899957909	PARATHOM PAR16 35 36° 3.1 W/827 GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	595.00 g
4052899957916	PARATHOM PAR16 35 36° 3.1 W/830 GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	595.00 g
4052899957923	PARATHOM PAR16 35 36° 3.1 W/840 GU10	Shipping carton box 10	257 mm x 110 mm x 70 mm	1.98 dm ³	595.00 g
4052899958005	PARATHOM PAR16 80 36° ADV 7.2 W/827 GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	598.00 g
4052899958012	PARATHOM PAR16 80 36° ADV 7.2 W/830 GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	598.00 g
4052899958029	PARATHOM PAR16 80 36° ADV 7.2 W/840 GU10	Shipping carton box 10	255 mm x 107 mm x 72 mm	1.96 dm ³	598.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For dimming conformity see

Product family datasheet

▶ www.ledvance.com/dim

For further products and actual information concerning LED lamps see

▶ www.ledvance.com/ledlamps

For Guarantee see

▶ www.ledvance.com/guarantee

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.