

# PRODUCT DATASHEET

## DP COMPACT 1200 44 W 6500K IP66 GR

DAMP PROOF COMPACT GEN 1 | Damp-proof luminaire, through-wired (L, N, E)

---

### Areas of application

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines



---

### Product benefits

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Easy access to electrical terminal thanks to end caps with twist and lock mechanism
- Tool-free electrical connection due to push button connector
- 5 years guarantee

---

### Product features

- High luminous efficacy: up to 120 lm/W
- Type of protection: IP66
- Beam angle: 120°
- Through-wiring 3x1.5mm<sup>2</sup> already installed



- Polycarbonate housing


---

**TECHNICAL DATA****Electrical data**


|                                          |                       |
|------------------------------------------|-----------------------|
| Nominal wattage                          | 44.00 W               |
| Nominal voltage                          | 220...240 V           |
| Mains frequency                          | 50...60 Hz            |
| Nominal current                          | 240 mA                |
| Inrush current                           | 12 A                  |
| Inrush current time $T_{h50}$            | 170 $\mu$ s           |
| Max. no. of lum. on circuit break. B16 A | 34                    |
| Max. no. of lum. on circuit break. C10 A | 29                    |
| Max. no. of lum. on circuit break. C16 A | 46                    |
| Power factor $\lambda$                   | > 0.90                |
| Total harmonic distortion                | 20 %                  |
| Protection class                         | II                    |
| Operating mode                           | Integrated LED driver |

**Photometrical data**

|                                              |                           |
|----------------------------------------------|---------------------------|
| Luminous flux                                | 5400 lm                   |
| Luminous efficacy                            | 120 lm/W                  |
| Color temperature                            | 6500 K                    |
| Light color (designation)                    | Cool Daylight             |
| Color rendering index Ra                     | > 80                      |
| Standard deviation of color matching         | $\leq 5$ sdc <sub>m</sub> |
| Luminous intensity                           | -                         |
| Flickering metric (Pst LM)                   | -                         |
| Stroboscope effect metric (SVM)              | -                         |
| Photobiological safety group acc. to EN62778 | RG0                       |
| Beam angle                                   | 120 °                     |

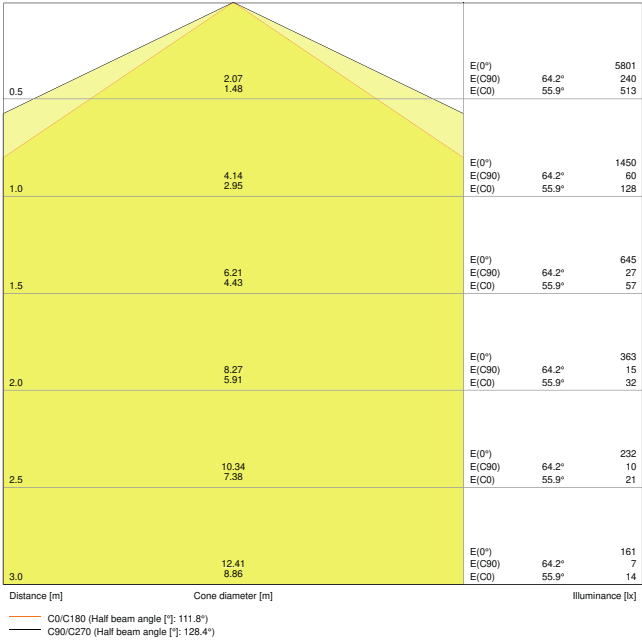


LDC typ cone

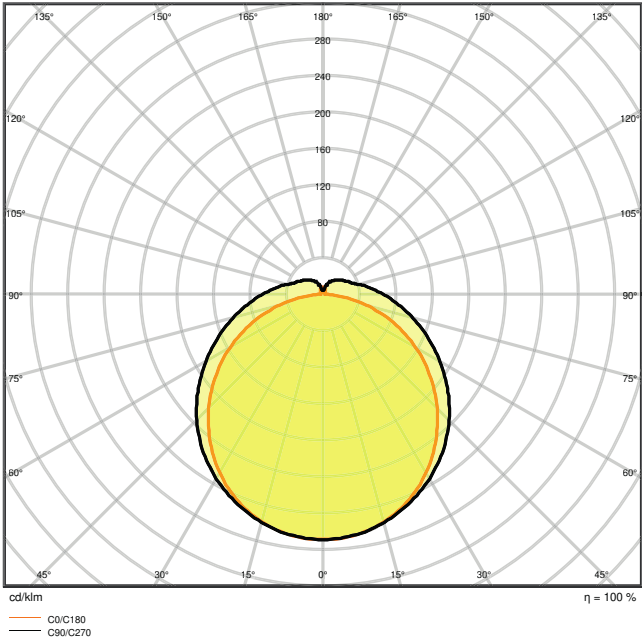

LDC typ polar

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1290.00 mm |
| Width          | 86.00 mm   |
| Height         | 68.00 mm   |
| Product weight | 1160.00 g  |



Materials & Colors

|                                 |                    |
|---------------------------------|--------------------|
| Product color                   | Gray               |
| Housing color                   | Gray               |
| Body material                   | Polycarbonate (PC) |
| Cover material                  | Polycarbonate (PC) |
| Light emitting surface material | Polycarbonate (PC) |

|                                            |        |
|--------------------------------------------|--------|
| Glow Wire Test according to IEC 60695-2-12 | 850 °C |
| Mercury content                            | 0.0 mg |

### Application & Mounting

|                                        |                            |
|----------------------------------------|----------------------------|
| Ambient temperature range              | -35...+50 °C               |
| Temperature range at storage           | -40...+70 °C               |
| Type of connection                     | Screwless terminal, 3-Pole |
| Type of protection                     | IP66                       |
| Protection class IK (shock resistance) | IK08                       |
| Dimmable                               | No                         |
| Mounting type                          | Suspended/Surface          |
| Mounting location                      | Ceiling / Wall             |
| Application environment                | Indoor                     |
| LED module replaceable                 | Not replaceable            |
| With light source                      | Yes                        |

### Lifespan

|                            |         |
|----------------------------|---------|
| Lifespan L70/B50 at 25 °C  | 50000 h |
| Lifespan L80/B10 at 25 °C  | 35000 h |
| Lifespan L90/B10 at 25 °C  | 20000 h |
| Number of switching cycles | 100000  |

### Control gear

|                |        |
|----------------|--------|
| Output current | 555 mA |
|----------------|--------|

### Certificates & Standards

|                                                      |                                |
|------------------------------------------------------|--------------------------------|
| Standards                                            | CE / CB / TÜV SÜD / EAC / RoHS |
| Luminaire with limited surface temperature, "D sign" | Yes                            |
| Ball shot safe                                       | No                             |

### Additional product data

|                       |   |
|-----------------------|---|
| Number of illuminants | - |
|-----------------------|---|

### EQUIPMENT / ACCESSORIES

- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

## DOWNLOAD DATA






| DOWNLOAD DATA                                                                       |                               |
|-------------------------------------------------------------------------------------|-------------------------------|
|     | User instruction              |
|     | Addon Technical Information   |
|    | Tender documents              |
|     | Declarations Of Conformity CE |
|    | IES file (IES)                |
|    | LDT file (Eulumdat)           |
|    | R3D file (Relux 3D Model)     |
|     | ROLF file (RELUX)             |
|   | M3D file (3D Model)           |
|  | ULD file (DIALux)             |
|  | UGR file (UGR table)          |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075210066 | Folding box<br>1             | 72 mm x 1,319 mm x 90 mm             | 1310.00 g    | 8.55 dm <sup>3</sup>  |
| 4058075210073 | Shipping box<br>6            | 1,340 mm x 200 mm x 240 mm           | 8380.00 g    | 64.32 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## ADDITIONAL CATALOG INFORMATION



## References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.