

# PRODUCT DATASHEET

## SF CIRC 350 V 18W 840 IP44

SURFACE CIRCULAR 350 | Wall and ceiling luminaire with IP44



### Areas of application

- Corridors
- Stairways
- Bathrooms
- Foyers

### Product benefits

- Indoor luminaire with high luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- 3 years guarantee

### Product features

- Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)
- Impact resistance: IK03
- Metal housing, PMMA cover
- Ambient temperature in operation: -20...+40 °C
- Indoor use only, not suitable for outdoor use

---


## TECHNICAL DATA

### Electrical data


|                                                             |                       |
|-------------------------------------------------------------|-----------------------|
| Nominal wattage                                             | 18.00 W               |
| Nominal voltage                                             | 220...240 V           |
| Mains frequency                                             | 50...60 Hz            |
| Nominal current                                             | 140 mA                |
| Inrush current                                              | 7 A                   |
| Inrush current time $T_{h50}$                               | 212 $\mu$ s           |
| Max. number of luminaires per miniature circuit breaker B16 | 35                    |
| Max. number of luminaires per miniature circuit breaker C10 | 35                    |
| Max. number of luminaires per miniature circuit breaker C16 | 56                    |
| Power factor $\lambda$                                      | > 0.55                |
| Total harmonic distortion                                   | < 120 %               |
| Protection class                                            | I                     |
| Operating mode                                              | Integrated LED driver |

### Photometrical data

|                                              |                       |
|----------------------------------------------|-----------------------|
| Luminous flux                                | 1440 lm               |
| Luminous efficacy                            | 80 lm/W               |
| Color temperature                            | 4000 K                |
| Light color (designation)                    | Cool White            |
| Color rendering index Ra                     | > 80                  |
| Standard deviation of color matching         | < 6 sdc <sub>cm</sub> |
| Luminous intensity                           | -                     |
| Low flicker                                  | Yes                   |
| Flickering metric (Pst LM)                   | -                     |
| Stroboscope effect metric (SVM)              | -                     |
| Photobiological safety group acc. to EN62778 | RG0                   |
| Photobiological safety group acc. to EN62471 | RG0                   |
| Beam angle                                   | 120 °                 |

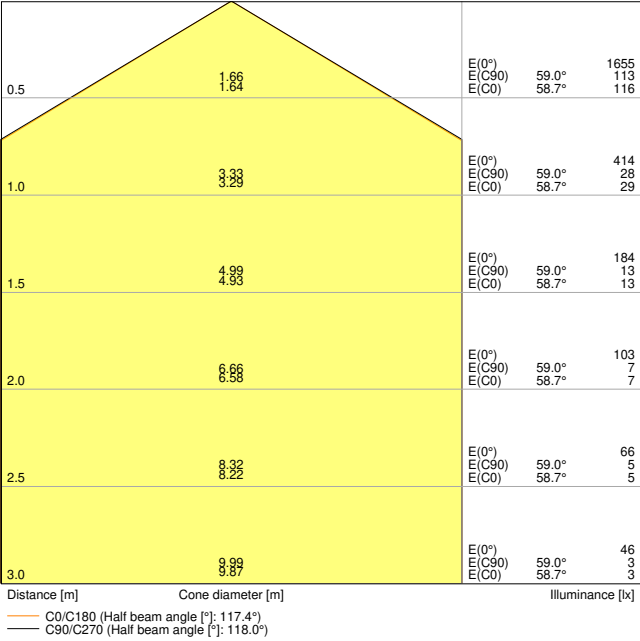


SF CIRC 350 V 18W 840 IP44

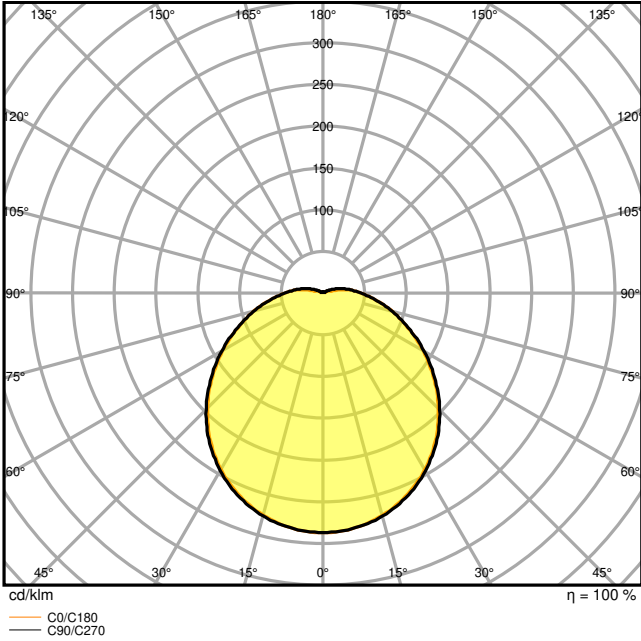

SF CIRC 350 V 18W 840 IP44

Dimensions & Weight

|                |           |
|----------------|-----------|
| Diameter       | 350.00 mm |
| Height         | 115.00 mm |
| Product weight | 410.00 g  |



Materials & Colors

|                                 |                               |
|---------------------------------|-------------------------------|
| Product color                   | White                         |
| Housing color                   | White                         |
| Body material                   | Steel                         |
| Cover material                  | Polymethylmethacrylate (PMMA) |
| Light emitting surface material | PMMA                          |

|                                            |        |
|--------------------------------------------|--------|
| Glow Wire Test according to IEC 60695-2-12 | 650 °C |
| Mercury content                            | 0.0 mg |

### Application & Mounting

|                                        |                    |
|----------------------------------------|--------------------|
| Ambient temperature range              | -20...+40 °C       |
| Temperature range at storage           | -20...+80 °C       |
| Type of connection                     | Terminal, 3-pin    |
| Type of protection                     | IP44 <sup>1)</sup> |
| Protection class IK (shock resistance) | IK03               |
| Dimmable                               | No                 |
| Mounting type                          | Surface            |
| Mounting location                      | Ceiling / Wall     |
| Application environment                | Indoor             |
| With light source                      | Yes                |
| Replaceable light source               | No                 |

<sup>1)</sup> Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 30000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 22000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 22000 h               |
| Lifespan L90/B10 at 25 °C  | 15000 h               |
| Number of switching cycles | 50000                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                |        |
|----------------|--------|
| Output current | 280 mA |
|----------------|--------|

### Certificates & Standards

|                                                      |                               |
|------------------------------------------------------|-------------------------------|
| Standards                                            | CE / CB / TÜV SÜD / EAC / EPD |
| Luminaire with limited surface temperature, "D sign" | No                            |
| Ball shot safe                                       | No                            |
| EPD                                                  | LEDV-00010-V01.01-EN          |
| Replaceable light source (EPREL)                     | Not replaceable               |

### EQUIPMENT / ACCESSORIES

– Replacement cover optional available

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

## DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                      |
|------------------------------------------------------------------------------------|----------------------------------------|------------------------------------|
|    | User instruction / safety instructions | SURFACE CIRCULAR SENSOR            |
|    | Legal information                      | LS Insert SF Circular              |
|    | Legal information                      | LS Insert SF Circular              |
|    | Legal information                      | Legal insert                       |
|   | Legal information                      | Informationstext 18 Abs 4 ElektroG |
|  | Declarations of conformity             | CE Declaration SF CIRC             |
|  | Declarations of conformity UKCA        | SF CIRC IP44                       |
|  | Declarations of conformity UKCA        | SF CIRC                            |
|  | EPD                                    | EPD EN SURFACE CIRCULAR SENSOR     |
| Photometric and lighting design files                                              |                                        | Document name                      |
|  | IES file (IES)                         | SF CIRC 350 V 18W 840 IP44         |
|  | LDT file (Eulumdat)                    | SF CIRC 350 V 18W 840 IP44         |
|  | ULD file (DIALux)                      | SF CIRC 350 V 18W 840 IP44         |
|  | ROLF file (RELUX)                      | SF CIRC 350 V 18W 840              |
|  | UGR file (UGR table)                   | SF CIRC 350 V 18W 840 IP44         |
|  | Light distribution curve type cone     | SF CIRC 350 V 18W 840 IP44         |
|  | Light distribution curve type polar    | SF CIRC 350 V 18W 840 IP44         |


| CAD/BIM files                                                                    |                  | Document name                        |
|----------------------------------------------------------------------------------|------------------|--------------------------------------|
|  | BIM Revit 3D     | SURFACE CIRCULAR                     |
|  | CAD STEP 3D      | SF CIRC 350                          |
| Tender texts                                                                     |                  | Document name                        |
|  | Tender documents | SURFACE CIRCULAR 350 18W 840 IP44-EN |

## LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                 |
|---------------|------------------------------|--------------------------------------|--------------|------------------------|
| 4058075617964 | Folding box<br>1             | 386 mm x 386 mm x 120 mm             | 779.00 g     | 17.88 dm <sup>3</sup>  |
| 4058075617971 | Shipping box<br>5            | 625 mm x 410 mm x 410 mm             | 4912.00 g    | 105.06 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## ADDITIONAL CATALOG INFORMATION



## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.