

PRODUCT DATASHEET

O FACADE POLE SENSOR 6 W 3000 K IP44 S SST

OUTDOOR FACADE POLE | Stainless steel wall luminaires with indirect illumination



Areas of application

- Outdoor
- Building facades
- Entrance lighting
- Gardens, balconies and other outdoor areas

Product benefits

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

Product features

- Bright and functional outdoor LED luminaires
- Type of protection: IP44
- Housing made of Polycarbonate covered with stainless steel




- Available as wall, ceiling and bollard luminaires
- Available with and without motion sensor
- Diffuser made of transparent polycarbonate

TECHNICAL DATA**Electrical data**


Nominal wattage	6.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	60 mA
Max. no. of lum. on circuit break. B16 A	38
Max. no. of lum. on circuit break. C10 A	54
Max. no. of lum. on circuit break. C16 A	34
Power factor λ	> 0.5
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	360 lm
Luminous efficacy	60 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥ 80
Standard deviation of color matching	< 6 sdcm
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	160 °

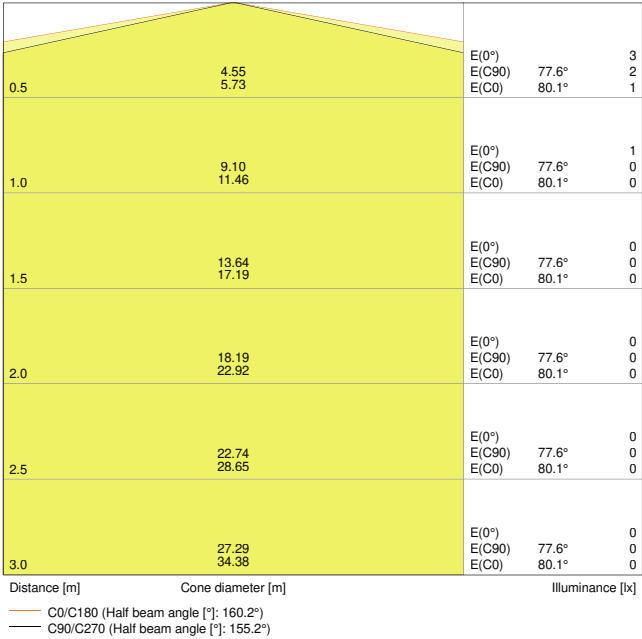


LDC typ cone

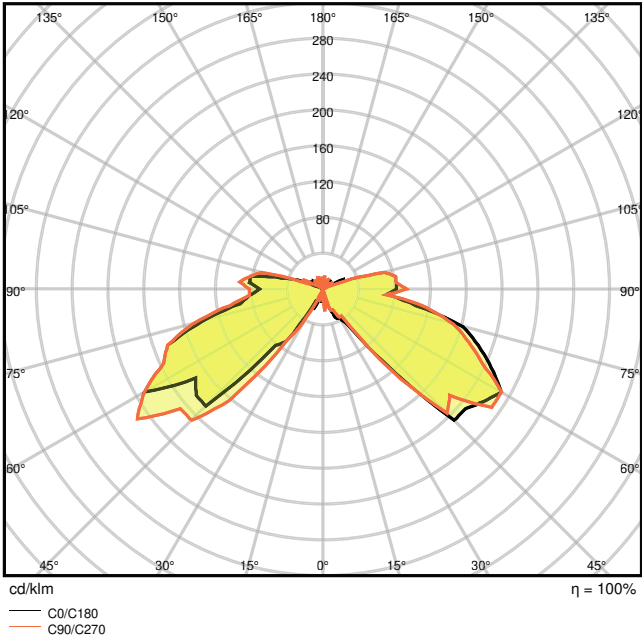


LDC typ polar

Dimensions & Weight

Length	150.00 mm
Width	102.00 mm
Height	135.00 mm
Product weight	500.00 g

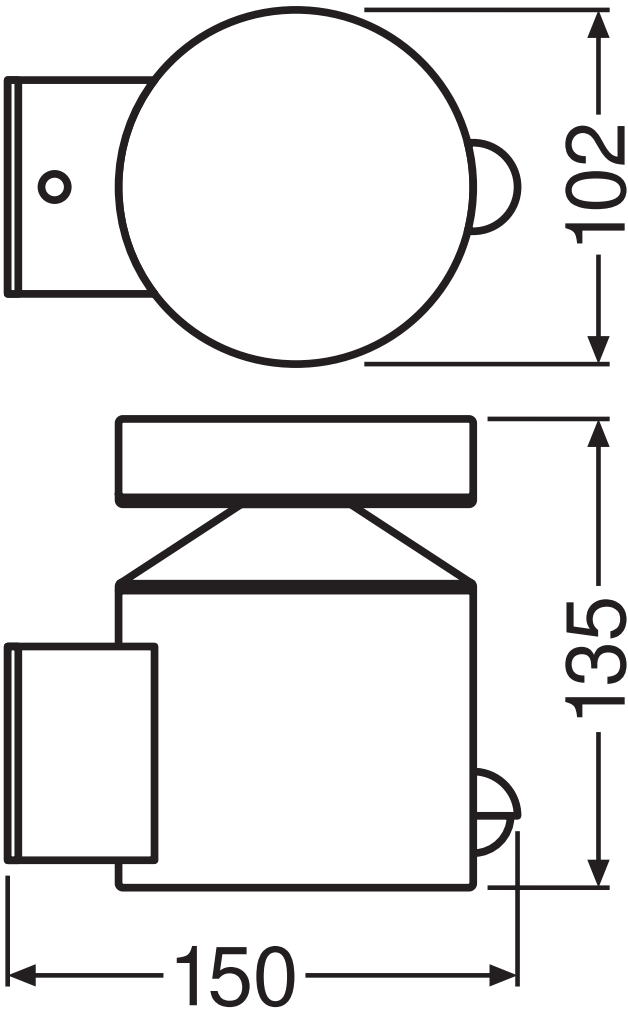

Product line drawing with numbers

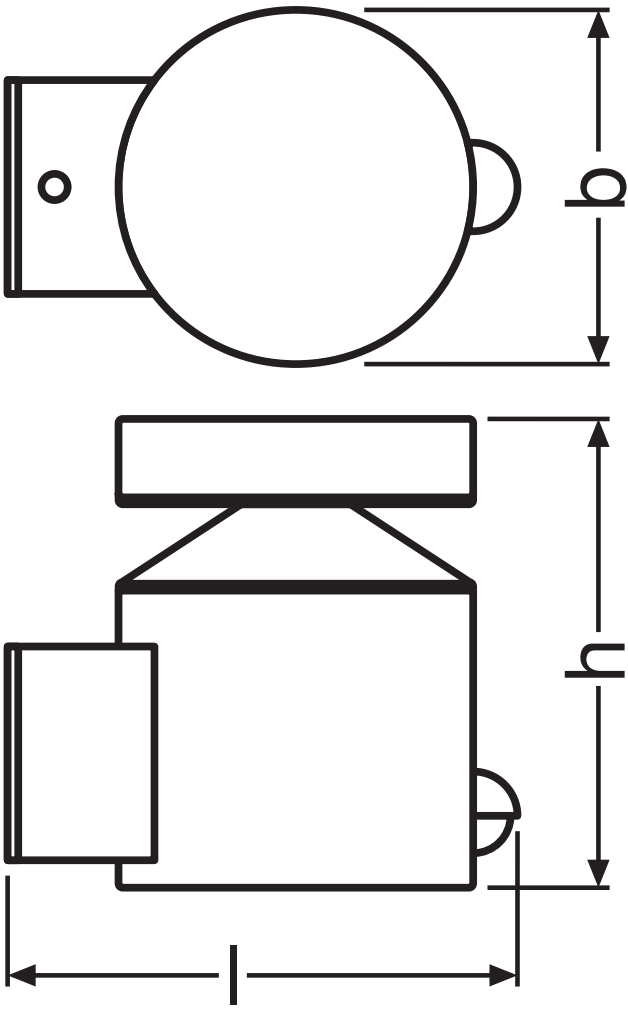

Product line drawing with numbers

Materials & Colors

Product color	Steel
Housing color	Steel
Body material	Stainless steel
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
---------------------------	--------------

Type of connection	Screw terminal, 2-Pole (L,N)
Type of protection	IP44
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Surface
Mounting location	Wall
Application environment	Outdoor
LED module replaceable	Not replaceable

Lifespan

Lifespan L70/B50 at 25 °C	30000 h
Number of switching cycles	15000

Sensor

Type of sensor	Motion / Light
Sensor technology	Passive infrared (PIR)
Sensor detection angle	120 °
Sensor controlled switching time	5 s/30 s/1 min/3 min/5 min/8 min
Detection range of motion sensor	3 m / 6 m
Detection threshold of daylight sensor	10 lx / 2000 lx
Sensor IP rating	IP44

Certificates & Standards

Standards	CE
Ball shot safe	No

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction
	Declarations Of Conformity CE

DOWNLOAD DATA



On-Pack-Info



IES file (IES)



LDT file (Eulumdat)



UGR file (UGR table)

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075075115	Folding box 1	124 mm x 154 mm x 166 mm	540.00 g	3.17 dm ³
4058075075122	Shipping box 6	380 mm x 175 mm x 320 mm	3471.00 g	21.28 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.