


PRODUCT DATASHEET OFFICE LINEAR V 2CCT PRISM

OFFICE LINEAR LUMINAIRE | Luminaire insert for Office Linear

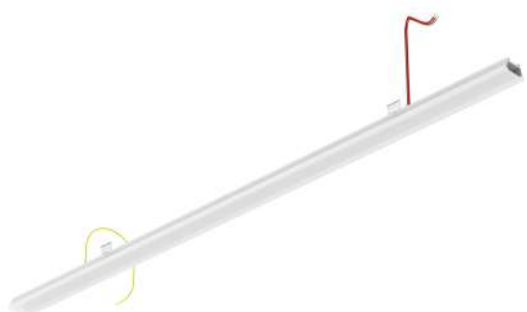

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- General indoor illumination
- Single and continuous line configuration

Product benefits

- High performance with CRI90 and up to 130 lm/W
- Highly versatile due to selectable power steps (Power Select - PS) on the driver
- Highly versatile due to selectable CCT
- Easy installation
- 5 years guarantee

Product features

- Modern design
- Lifetime (L70/B50): up to 100,000 h
- Lifetime (L80/B10): up to 89,000 h
- High luminous efficacy: up to 130 lm/W
- Luminous flux up to 4400 lm
- Initial color consistency: 3 SDCM


TECHNICAL DATA

Electrical data

Nominal wattage	34.00 W
Nominal current	380.000 mA
Protection class	I

Photometrical data

Luminous flux	4420 lm
Luminous efficacy	130 lm/W
Color temperature	3000 ... 4000 K
Light color (designation)	Warm White / Cool White
Color rendering index Ra	> 90
Standard deviation of color matching	3 sdcm
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	< 0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	80 °
UGR	≤ 22



OFFICE LINEAR V 2CCT PRISM

Dimensions & Weight

Length	1120.00 mm
Width	42.50 mm
Height	45.00 mm
Product weight	500.00 g



OFFICE LINEAR V 2CCT
PRISM/UGR19/OPAL

Materials & Colors

Body material	Aluminum
Cover material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	No
Application environment	Indoor
LED module replaceable	Not replaceable
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	89000 h ¹⁾
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / ENEC / EAC
-----------	-----------------

DOWNLOAD DATA

Photometric and lighting design files		Document name
	LDC typ polar	OFFICE LINEAR V 2CCT PRISM

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854251498	Folding box 1	1,130 mm x 65 mm x 54 mm	735.00 g	3.97 dm ³
4099854251504	Shipping box 12	1,147 mm x 217 mm x 244 mm	9785.00 g	60.73 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.